


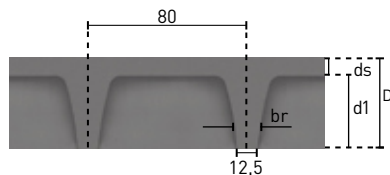


ALTURA DE LAS LOSAS	ESPESOR DE LA CUCHILLA	ALTURA TOTAL	ANCHO DE LOS NERVIOS			ÁREA DE SECCIÓN	DISTANCIA DO C. G. A		INERCI		PESO PROPIO	VOLUMEN DE HORMIGÓN
			ABAJO	ARRIBA	PORMEDIO		FACE SUPERIOR	FACE INFERIOR	INERCI	ALTURA EQUIVALENTE		
cm	cm	cm	cm	cm	cm	cm ²	cm	cm	cm ⁴	cm	kN /m ²	m ³ /m ²
20,0	5,0	25,0	12,5	15,6	14,0	681	7,5	17,5	34444	17,3	2,13	0,085
	7,5	27,5				881	8,0	19,5	46395	19,1	2,75	0,110
	10,0	30,0				1081	8,8	21,2	60494	20,9	3,38	0,135
25,0	5,0	30,0	12,5	17,1	14,8	770	9,4	20,6	59543	20,8	2,40	0,096
	7,5	32,5				970	9,7	22,8	77643	22,7	3,03	0,121
	10,0	35,0				1170	10,3	24,7	97633	24,5	3,65	0,146
30,0	5,0	35,0	12,5	20,0	16,3	888	11,5	23,5	95454	24,3	2,78	0,111
	7,5	37,5				1088	11,6	25,9	122004	26,4	3,40	0,136
	10,0	40,0				1288	12,1	27,9	150167	28,2	4,03	0,161
35,0	5,0	40,0	12,5	22,5	17,5	1013	13,6	26,4	142988	27,8	3,18	0,127
	7,5	42,5				1213	13,6	28,9	179875	30,0	3,80	0,152
	10,0	45,0				1413	14,0	31,0	218056	32,0	4,43	0,177
40,0	5,0	45,0	12,5	25,8	19,2	1166	15,8	29,2	205963	31,4	3,65	0,146
	7,5	47,5				1366	15,8	31,7	255473	33,7	4,28	0,171
	10,0	50,0				1566	16,1	33,9	306124	35,8	4,90	0,196
d1	ds	D	bi	bs	br	A	rs	ri	I	heq	CONCRETO 25kN/m ³	



*Utilizando anulador de nervio que es el elemento intermedio entre las formas.

atex 800 • pestañas diferentes



Medida mínima para completar donde completa el ancho total (ajusta la forma entera)

*Complementar con elemento de apoyo de las formas de 7,5 cm de ancho.